


### TE31 Series



### Smart Educations Solutions

- Touch Experience**  
 State-of-the-art infrared touch system with a very fluid touch experience
- Interactivity**  
 Interactive presentations allow you to connect faster and better with your audience
- Collaboration**  
 Work collaboratively, both locally and remotely, for increased productivity and improved results
- Take notes on the display**  
 Make annotations on the screen, your files, videos, or images. Save and share!

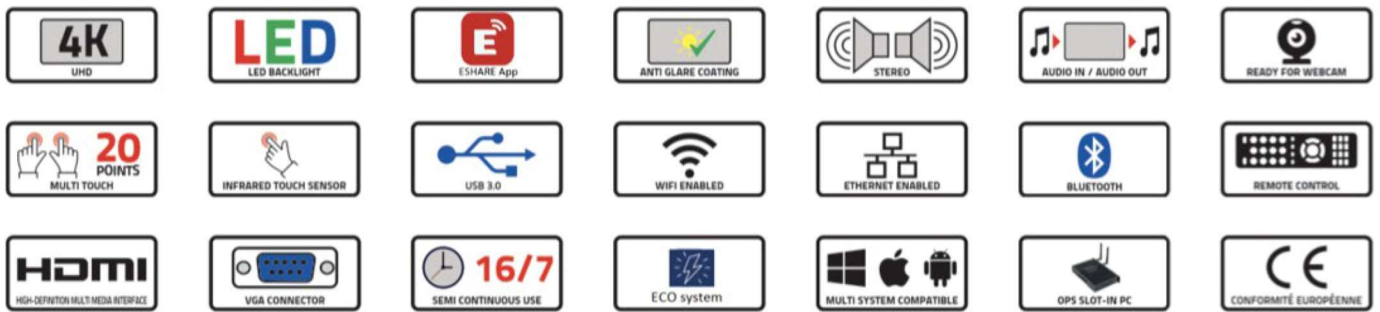

**Wireless Sharing**

Wireless system to transfer from Windows, Chromebook, iOS or Android devices to the panel

**All-in-One (OPS optional)**

It can include an OPS (optional PC module) that turns the display into a more powerful tool to use in a business environment

**Multiplatform**

Connect any external device (Windows, Mac, Chromebook or Linux) and work directly on the interactive display

**Remote Management System**

Remote real-time screen control / view  
 Power Management (Shut down or Power On)  
 Information distribution and updates  
 Device-level usage history and reports  
 Applications on mobile device with license

# Interactive Flat Panel

Model No.		TE6531	TE7531	TE8631
LED Parameters	Size	65INCH	75INCH	86INCH
Display Parameters	BACK LIGHT	D-LED	D-LED	D-LED
	Panel Technology	IPS	IPS	IPS
	Active Display Area	1428.48 (H) x 803.52 (V)	1649.74 (H) x 927.94(V)	1895.04 (H) x 1065.96 (V)
	Resolution	3840x2160(pixels,RGB)	3840x2160(pixels,RGB)	3840x2160(pixels,RGB)
	Contrast Ratio	40000: 1	4000: 1	1200: 1
	Brightness	350cd/m2	350cd/m2	350cd/m2
	Colors	72% NTSC	72% NTSC	72% NTSC
	Aspect Ratio	16:9	16:9	16:9
	Response time	8ms ( typ.)	8ms ( typ.)	8ms ( typ.)
	Viewing Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
	Led Life time	50,000 Hrs (min.)	50,000 Hrs (min.)	50,000 Hrs (min.)
	Screen Protecctor	4mm Tempered AG Glass	4mm Tempered AG Glass	4mm Tempered AG Glass
	Eye protect technology	Low Bluelight	Low Bluelight	Low Bluelight
Microphone	External Wireless Microphone included			
Speaker	Built-in Speaker	8Ω , 15W x2	8Ω , 15W x2	8Ω , 15W x2
Power Parameters	Power(No PC)	≤250W	≤350W	≤ 450W
	Working Voltage	100V~240V AC	100V~240V AC	100V~240V AC
	Standby Power	≤ 0.5W	≤ 0.5W	≤ 0.5W
ANDROID OS	Android System	Android 11		
	RAM and ROM	DDR4 4GB & EMMC 32GB		
	CPU /GPU	Quad Core, A55*4, 1.9Ghz GPU - Mali G52MP2		
	WIFI	WIFI 5 , 802.11 a/b/g/n/ac ( 2.4Ghz + 5Ghz) ; with Hotspot 5Ghz		
	Bluetooth	Bluetooth 5.0		
	UI Resolution	4K UI		
	Ethernet network	10M/100M		
Input & Output	Input (Backside)	RJ45 IN*1; RS232*1; HDMI IN 2.0*2; AUDIO IN *1; Touch USB *1; AV IN*1; AV Out *1; VGA IN *1; USB 2.0*1; USB 3.0*1 ; MIC IN Port *1		
	OutPut	SPDIF OUT *1; AUDIO OUT*1; EARPHONE OUT (3.5mm jacket) ;		
	Front Connection	HDMI IN *1; TOUCH USB *1 ; Type C *1 ; USB 3.0 *3		
Touch parameters	Touch Technology	Infrared technology (IR)		
	Touch Points	Windows system: 40TOUCH; Android system: 20 TOUCH		
	Inductive objects	Finger or pen		
	Acuracy	Φ 2mm		
	Response time	≤6ms		
Environment	Operation System	Support Windows, Mac, Android , Linux, Chrome OS		
	Storage & Working Temperature	Working Temperature: 0 °C~ 45 °C, Storage Temperature: -20 °C~ 60 °C		
	Storage &Working Humidity	10% ~90%		
Packing Parameters	physic Size	1490.6*904.8*88.95mm	1712.9*1030.9*89.15mm	1958.9*1169.75*89.15mm
	Plywood Carton Size	1576*980*200mm	1785*1125*200mm	2040*1260*200mm
	Net Weight	42±1 kg	54±1 kg	69±1 kg
	Gross Weight	56.5±1 kg	69±1 kg	83.8±1 kg
Standard configuration	Acceesories	Remote control* 1; Power cable 3M *1; Quick start guide ; Stylus Pen *3 ; Wall mounted Bracket *1;		



UHD 4K



2mm Pen Tip



HID 32 Touch



Pen & Touch Differentiation



Superior Connectivity



Dual System



Wireless Screen Sharing



Screen Divide



2x15W Speaker